

Contact: insidesales@talius.com

Fax: 250.832.8577 Tel: 250.832.7777

Order Quote

Dealer: _____

Contact Name: _____

Date: _____ PO#: _____

SHIPPING: Your Carrier: _____ Acct #: _____ Talius Freight Program

Customer (Tag) Name _____

Unit Location: _____ Quantity: _____

Repeat Customer? Yes No

Unit(s) #: _____ Site Map# (if required): _____

STEP 1: CURTAINTYPE

SAFE VIEW PERFORATED 56 SAFE VIEW - GRILLE 56




STEP 7: BUILD-UP

Check off on the diagram at the right where you want to have build-up, and then check off below, the build-up thickness required for each location

Build-up Tubing 2" x 1" 2" x 2"
 2" x 3" 2" x 4"

Predrill Tubing Location:
 Yes No



STEP 2: PROFILE COMBINATIONS

The profile combination is determined based on unit size. To see available profile combinations, see page 36. To ensure units match on an elevation, a unit can be upgraded to an alternate combination, for an upcharge. When quoting, the Inside Sales Team will let you know which profile combination is required for this unit.

Match profile combination with unit(s) #: _____


STEP 8: LOCKS

Automatic Locks: Talius Hanger Locks

Manual Locks: (Please indicate lock location and public access side)

Manual Sliding Lock Bars
 Centre Key Lock, Access Both Sides

NOTE: Default Lock Location on Bottom Profile




STEP 3: UNIT DIMENSIONS

Does your B1 measurement include:

2" (50 mm) upset to allow bottom profile to clear the top of the opening?


Yes
 Not required

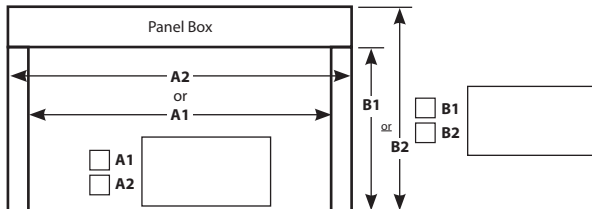

STEP 9: OPERATORS


Indicate Operator Location

Operator from Reverse Side (shaft access)

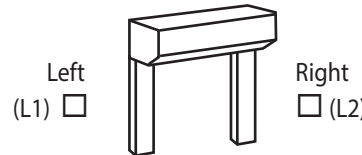

Exit Hole Location


For Crank Rod operator or Manual override select exit location



STEP 4: GUIDE RAILS

GRM-66 GR-75

Pre-drill rails: 8.5 mm 10 mm 12.5 mm



STEP 5: COLOUR SELECTIONS

Safe View curtains, GRM-66 rails and bottom profiles are only available in Silver. Please select the colour for the panel box, build-up, sill and GR-75 Rails (if required):

White
 Beige
 Brown
 Silver
 Custom Colour
 Name: _____

STEP 6: SILLS

L-Shaped 22 x 42mm (7/8" x 1-11/16"), Cut at A2
 Extra Sill: Qty: _____ Length: _____

STEP 10: OPERATOR COMPONENT OPTIONS

Manual Gear Operator

Handle: Default - Removable with bell connector Handle attached

Torsion Spring: (unit with this operator must have sliding locks)

Standard Limit Motor Switch

Style: Maintained Momentary
 Paddle Switch: SPDT DPDT
 Medium Security Key Switch
Cover Plate: None Single
 Plastic Double Triple
 Stainless Quadruple
 High Security Key Switch
 Surface Recessed

Keyed: Different Alike Qty: _____

Somfy RTS Motor

Telis 1 Transmitter
 Telis 4 Transmitter
 Telis 16 Transmitter
 Decoflex 1 White
 Decoflex 5 White
 Somfy Keychain Remote

24' Somfy RTS Motor Cable

Somfy® Specialty Transmitters

Somfy MyLink™ Smoove® 1 Telis 1 Chronis RTS 24/7 Timer
 RTS Repeater Smoove® 4 Somfy® Key Chain Remote
 RTS Digital Keypad Smoove® Faceplate Colour: _____

Upgrade to Manual Override Motor (Select crank rod)

Attached Removable w/Bell Removable with Universal

NOTES _____